

Head Office:


Vortex Optical Coatings Ltd Unit 10 Jacknell Road Hinckley Leicestershire LE10 3BS

Telephone:

+44 (0)1455 613029

Email:

enquiries@vortexoc.com

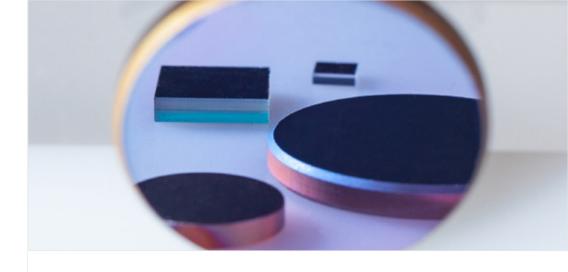

3.900µm Filter for Reference

Part Number: NBP-3900-180-25

Diameter Sample: 25mm **Price:** £250.00 (Free Shipping)

- Stock Reference Filters "on the shelf" for next day shipping, 25 mm diameter x 0.5 mm
- Vortex's trademark RockArd© deposition technology makes our filters highly durable and suitable for the toughest environments.
- All of our filters exhibit high angular tolerance, extremely low change with temperature and very high resistance to thermal shock.

Suitable Detectors

These Filters are suitable to be used in Lead Selenide (PbSe), Mercury Cadmium Telluride (MCT) and Boltometer type detectors.

Do you need a custom quote?

For large volumes and specific enquiries please get in touch!

Optical Specification

| Centre Wavelength | 3900 nm (+/- 20nm) | |
|-----------------------|---------------------------------|--|
| FWHM | 180 nm (+/- 15nm) | |
| Transmission Peak | >75% | |
| Blocking Range | UV - 20µm+ | |
| Angle Of Incidence | O° | |
| Substrate | 25 mm Diameter, 0.5 mm Thick | |
| Surface Quality | Less than 60-40 Scratch-Dig | |

Environmental Specification

| Adhesion | MIL-C- 48497A | Para 4.5.3.1 |
|---------------------|------------------|--------------|
| Humidity | MIL-C- 48497A | Para 4.5.3.2 |
| Mild Abraision | MIL-C- 48497A | Para 4.5.3.3 |
| Severe Abrasion | MIL-C- 48497A | Para 4.5.5.1 |
| Cleanability | MIL-C- 48497A | Para 4.5.4.2 |
| Water Solubility | MIL-C- 48497A | Para 4.5.5.3 |

Spectral Performance

