



Head Office:


Vortex Optical Coatings Ltd
 Unit 10 Jacknell Road
 Hinckley
 Leicestershire
 LE10 3BS

Telephone:

+44 (0)1455 613029

Email:

enquiries@vortexoc.com

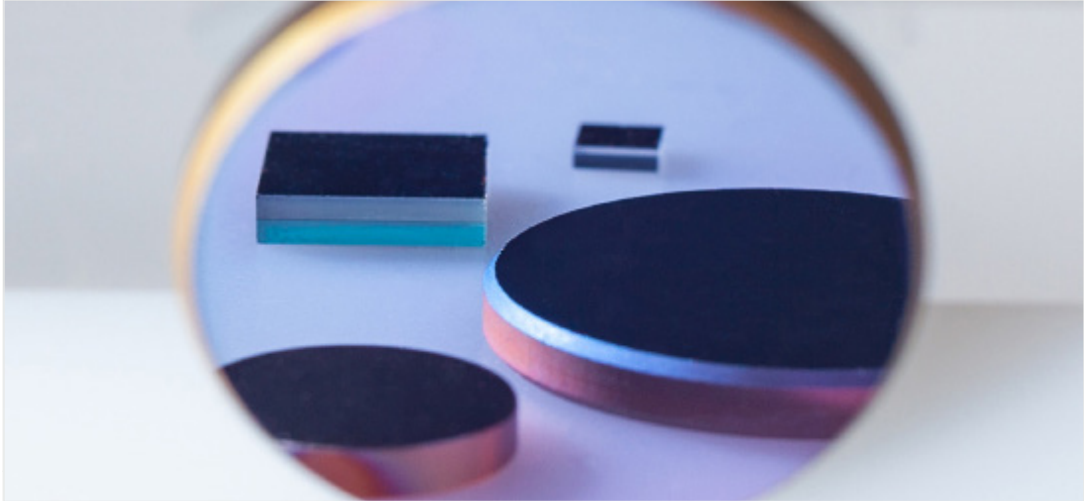

3.055µm Filter for Acetylene Detection

Part Number: NBP-3055-145-25

Diameter Sample: 25mm

Price: £300.00 (Free Shipping)

- Stock Acetylene Filters "on the shelf" for next day shipping, 25 mm diameter x 0.5 mm thick.
- Vortex's trademark RockArd® deposition technology makes our filters highly durable and suitable for the toughest environments.
- All of our filters exhibit high angular tolerance, extremely low change with temperature and very high resistance to

Suitable Detectors

These Filters are suitable to be used in Lead Selenide (PbSe), Mercury Cadmium Telluride (MCT) and Boltometer type detectors.

Optical Specification

Centre Wavelength	3055 nm (+/- 16nm)
FWHM	145 nm (+/- 17nm)
Transmission Peak	>75%
Blocking Range	UV – 20µm+
Angle Of Incidence	0°
Substrate	25 mm Diameter, 0.5 mm Thick
Surface Quality	Less than 60-40 Scratch-Dig

Environmental Specification

Adhesion	MIL-C-48497A	Para 4.5.3.1
Humidity	MIL-C-48497A	Para 4.5.3.2
Mild Abrasion	MIL-C-48497A	Para 4.5.3.3
Severe Abrasion	MIL-C-48497A	Para 4.5.5.1
Cleanability	MIL-C-48497A	Para 4.5.4.2
Water Solubility	MIL-C-48497A	Para 4.5.5.3

Do you need a custom quote?

For large volumes and specific enquiries please get in touch!

Spectral Performance

