



Head Office:


Vortex Optical Coatings Ltd
Unit 10 Jacknell Road
Hinckley
Leicestershire
LE10 3BS

Telephone:

+44 (0)1455 613029

Email:

enquiries@vortexoc.com

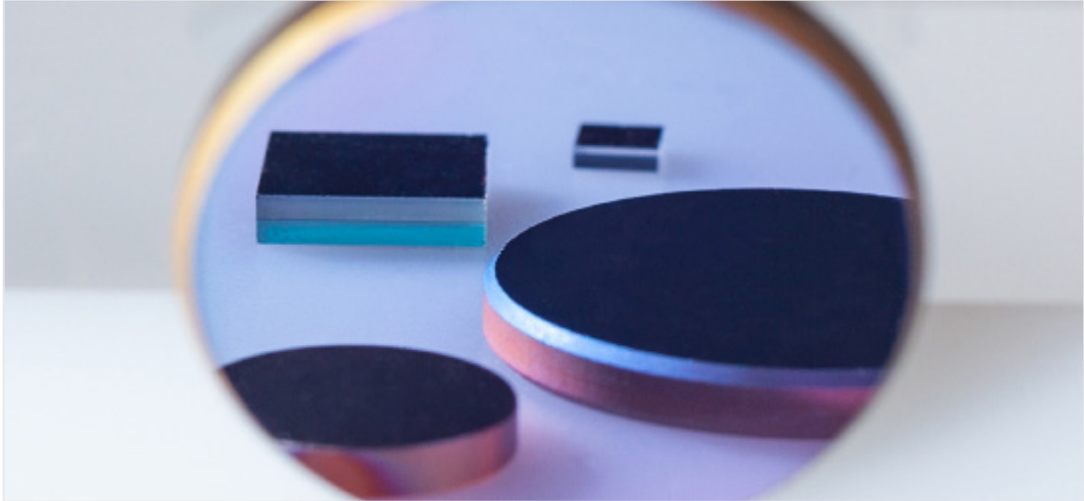

5.330µm Filter for Nitrogen Monoxide Detection (NO)

Part Number: NBP-5330-190-25

Diameter Sample: 25mm

Price: £250.00 (Free Shipping)

- Stock Nitrogen Monoxide Filters "on the shelf" for next day shipping, 25 mm diameter x 0.5 mm thick.
- Vortex's trademark RockArd® deposition technology makes our filters highly durable and suitable for the toughest environments.
- All of our filters exhibit high angular tolerance, extremely low change with temperature and very high resistance to thermal shock.

Suitable Detectors

These Filters are suitable to be used in Lead Selenide (PbSe), Mercury Cadmium Telluride (MCT) and Boltometer type detectors.

Optical Specification

Centre Wavelength	5330 nm (+/- 25nm)
FWHM	190 nm (+/- 25nm)
Transmission Peak	>75%
Blocking Range	UV - 20µm+
Angle Of Incidence	0°
Substrate	25 mm Diameter, 0.5 mm Thick
Surface Quality	Less than 60-40 Scratch-Dig

Environmental Specification

Adhesion	MIL-C-48497A	Para 4.5.3.1
Humidity	MIL-C-48497A	Para 4.5.3.2
Mild Abrasion	MIL-C-48497A	Para 4.5.3.3
Severe Abrasion	MIL-C-48497A	Para 4.5.5.1
Cleanability	MIL-C-48497A	Para 4.5.4.2
Water Solubility	MIL-C-48497A	Para 4.5.5.3

Do you need a custom quote?

For large volumes and specific enquiries please get in touch!

Spectral Performance

